




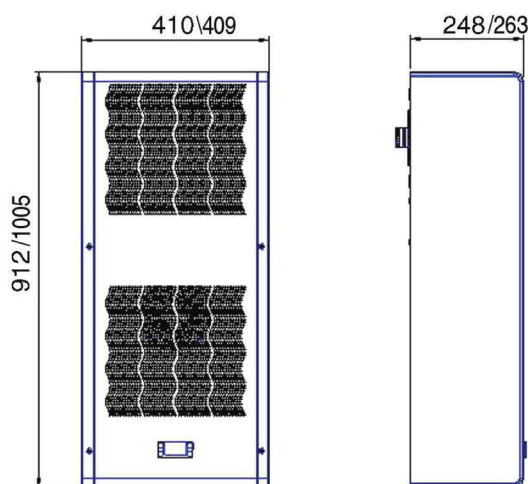

PROTHERM Indoor CVE15

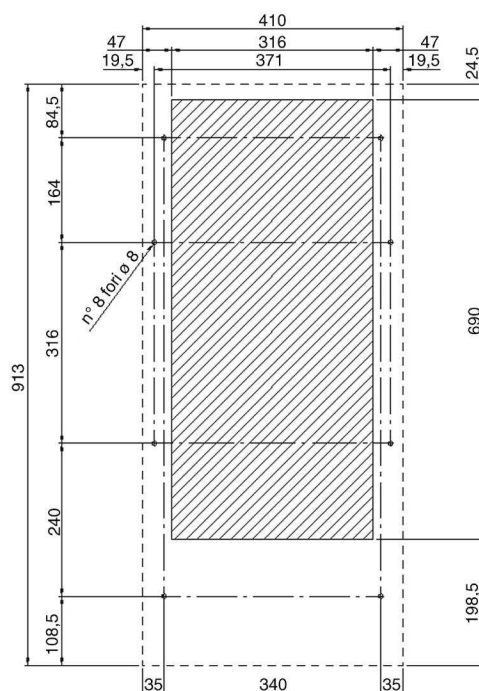

Performance - Resa - Leistung - Rendimiento

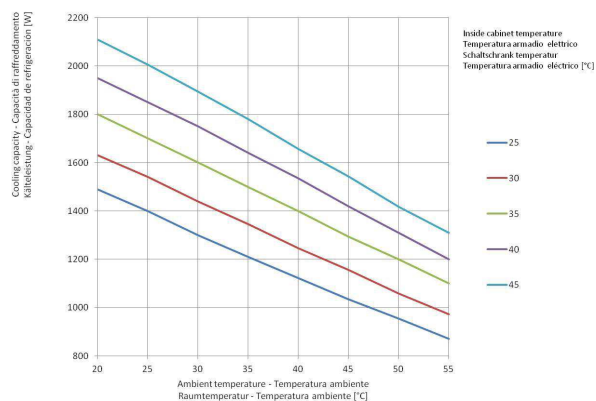

* Vedere dima CVE20 a pag. 39 -- Ref. cut-out CVE20 at pag. 39

CODE - CODICE - MODEL - CODIGO	M.U.	CVE15002208000	CVE15002288000	CVE15U12038000	CVE15U12208000	CVE15U12628000*
Power supply - Alimentazione - Spannungsversorgung - Tensi3n	V - ph - Hz	230-1-50/60	400-2-50 460-2-60	115-1-60	230-1-50/60	400-3-50 460-3-60
Cooling capacity L35L35 - Potenza raffreddamento L35L35 K4lteleistung L35L35 - Potencia frigorifica L35L35 - DIN 3168	W	1500-1600	1400-1500	1600	1600	1500
Cooling capacity L35L50 - Potenza raffreddamento L35L50 K4lteleistung L35L50 - Potencia frigorifica L35L50 - DIN 3168	W	1200-1280	1150-1200	1280	1280	1200
Height / Widht / Depth - Altezza / Larghezza / Profondit4 H3he / Breite / Tiefe - Altura / Ancho / Profundidad	mm	912x410x248	912x410x248	912x410x248	912x410x248	1005x409x263
Max running current - corrente max, in marcha Max. Stromaufnahme - Corriente m4xima, en marcha	A	3,9 / 4,3	2,5 / 2,6	9,4	4,5	2,37
Starting current - Corriente assorbita alla partenza Anlaufstrom - Corriente absorbida al arranque	A	28	110	50	28	20
Pre-Fuse T - Fusibile T - Absicherung T - Elemento previo de fusibile T	A	8	6	15	15	15
Power consumption L35L50 - Potenza assorbita L35L50 Leistungsaufnahme L35L50 - Potencia absorbida L35L50 - DIN3168	W	750-825	750-825	825	825	890
Side cabinet fan flow, free blowing - Portata aria ventil. lato armadio, bocca libera Luftmenge Schrankseite, freiblasend - Caudal aire ventil. Lado armario	m3/h	540-580	540-580	580	580	580
Regulation Temperature limits - Limiti di regolazione Temperatura Temperatur Einstellbereich - limites de ajuste de Temperatura	°C	+25 / +45	+25 / +45	+25 / +45	+25 / +45	+25 / +45
Side ambient Temperature limits - Limiti di Temperatura lato ambiente Umgebungstemperatur - Limites Temperatura lado ambiente	°C	+20 / +55	+20 / +55	+20 / +55	+20 / +55	+20 / +55
Side cabinet protection degree - Protezione lato armadio Schutzgrad Schrankseite - Protecci3n lado armario	IP/Type	54 / -	54 / -	- / 12	- / 12	- / 12
Noise level - Rumorosit4 - Ger4uschpegel - Nivel de ruido	dB(A)	65	65	65	65	65
Weight - Peso - Gewicht - Peso	kg	46	53	46	46	48

Opzioni / Accessori: vedi Pagine 148 - 152
Options / Accessories : see pages 148 - 152



SWITCHGEAR AIR CONDITIONERS - CONDIZIONATORI PER QUADRI ELETTRICI - SCHALTSCHRANK KLIMATISIERUNG - ACONDICIONAMIENTO DE CUADRO ELECTRICOS
INDOOR - PROTHERM